



Work Order ID 71088

Wednesday, June 22, 2011 9:22:17 AM




Page 1

Item ID: D2258-154 Accept  Setup Start 
Revision ID: Stop 
Item Name: PLACARD
Start Date: 6/22/2011 Start Qty: 8.00  Cust Item ID:
Required Date: 6/23/2011 Req'd Qty: 8.00  Customer:
Reference:


Approvals: Process Plan: CZ Date: 11/06/22 Tooling: _____ Date: _____ Run Start 
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop 

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
----------	--------------

100		0.00							
									
Purchasing	Memo	0.00							
Purchasing	Issue P/O: <u>14345</u>								
	E-mail or Ship electronic file and or dwg to vendor								
	Manufacture as per Dwg and supplied files								
	Possible supplier: Studio Letrage								
	Material release note is required.								

CZ 11/06/22 (8)

110	Receive & Inspect for Damage & Mat'l Certs	0.00							
									
Packaging	Memo	0.00							
Packaging									

Pu/6/2 3 (8)

Work Order ID 71088

Wednesday, June 22, 2011 9:22:17 AM



Page 2

Item ID: D2258-154

Accept



Setup Start



Revision ID:

Stop



Item Name: PLACARD

Start Date: 6/22/2011 Start Qty: 8.00



Cust Item ID:

Required Date: 6/23/2011 Req'd Qty: 8.00



Customer:

Reference:

Run Start



Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____

Stop



QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Sequence ID/
Work Center IDOperation
DescriptionSet Up/
Run Hours

Tool ID

Tool #

Plan
CodeAccept
QtyReject
QtyReject
NumberInsp.
Stamp

120



QC

Quality Control

QC6- Inspect dimensions to drawing

0.00

0.00

Memo

8 ulos/23



130



Packaging

Packaging

Identify as per dwg & Stock Location: ST505

0.00

0.00

Memo

JB (8) 11/06/24

140



QC

Quality Control

QC21- Final Inspection - Work Order Release

0.00

0.00

Memo

11/06/27df
MF
11-06-24

Picklist Print

Wednesday, June 22, 2011 9:22:15 AM

Page 1

Work Order ID: 71088



Parent Item: D2258-154



Parent Item Name: PLACARD



Start Date: 6/22/2011

Required Date: 6/23/2011


Start Qty: 8.00

Required Qty: 8.00

Comments: IPP revA 11.06.22 new issue EC verified by:JLM

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D2258-154P  PLACARD		Purchased	No				Each	0.0000		8			

Pur/p 23 @

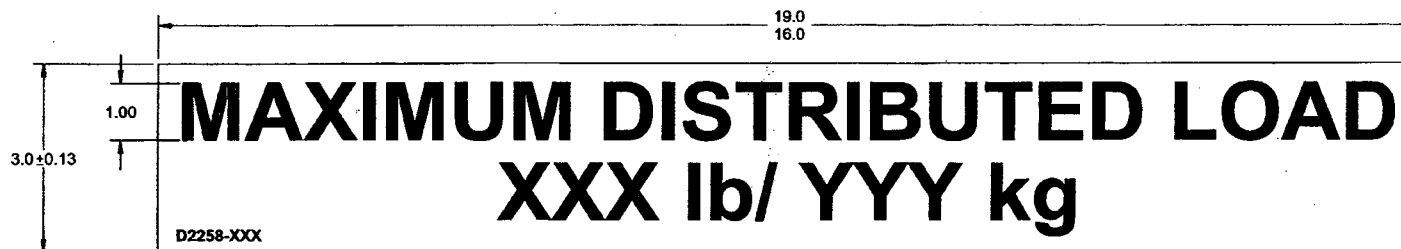

D2258-XXX PLACARD
(XXX = ALLOWABLE WEIGHT IN POUNDS)

PART NUMBER	LOAD
D2258-132	132 lb/ 60 kg
D2258-146	146 lb/ 66 kg
D2258-154	154 lb/ 70 kg
D2258-160	160 lb/ 73 kg
D2258-170	170 lb/ 77 kg
D2258-176	176 lb/ 80 kg
D2258-200	200 lb/ 91 kg
D2258-220	220 lb/ 100 kg
D2258-300	300 lb/ 136 kg

C24106122
W10:71088

PRELIMINARY ISSUE

NOTES:

- 1) MATERIAL: RED LETTERS, 1 HIGH, ADHESIVE BACK
MANUFACTURED FROM 3M, 7 MIL MASKING FILM #8522CP OR
AVERY IPM #2031
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) PART NUMBER = D2258-MAX DISTRIBUTED WEIGHT IN POUNDS (lbs) OF THE BASKET.
EXAMPLE: D2258-132 IS A BASKET WITH MAX DISTRIBUTED WEIGHT OF 132 POUNDS (lbs).

F	ADD P/N D2258-154 (ZN B5-1)	(REF. NCR11-670)	MB	11.06.17
E	ADD P/N D2258-146 (ZN B5-1)	UPDATE TOLERANCE AS PURCHASED (ZN D4-1, D8-1)	CP	10.01.15
D	ADD P/N D2258-176		HS	09.06.03
C	REDRAWN. SEE PAR 08-026		AJS	08.10.29
B	ADDED NOTE		BW	95.11.29
A	NEW ISSUE		BW	94.02.28
REV.	DESCRIPTION		BY	DATE
DESIGN	BW			
DRAWN				
CHECKED				
MFG. APPR.				
APPROVED				
DE APPR.				
DATE	11.06.17			

DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWING NO. D2258	REV. F SHEET 1 OF 1
TITLE UTILITY BASKET PLACARD	SCALE NTS
COPYRIGHT © 1994 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

210 Main Street W.
Hawkesbury, Ontario K6A 2H6

Invoice No.: 15963
Date: 06/23/2011
Ship Date:
Page: 1
Re: Order No. 11087

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Dart Aerospace Ltd
Hawkesbury, Ontario

Item No.	Unit	Quantity	Description	Tax	Unit Price	Amount
			<p>8 B2268-154P set up and cut vinyl</p> <p>H - HST 13%</p> <p>HST</p> <p>PST Exempt: #6122-5207</p> <p>8 6/04/23</p>	H	6.00	48.00
<p>Studio de Lettrage HST: #869034678RP001</p> <p>Shipped By: Tracking Number:</p> <p>Comment: PO 14345</p> <p>Sold By:</p>						<p>Total Amount</p> <p>54.24</p>



PRODUCT DATA BULLETIN

Product Data Bulletin: A5-O
Avery Graphics™ A5 Opaque
5-year **INTERMEDIATE** calendered vinyl film
Dated: 10/3/02

Description:

Avery Graphics™ A5 Opaque intermediate films are flexible, high-gloss calendered vinyls designed for use on computer sign cutting equipment. This construction provides excellent cutting, weeding and transferring characteristics for signage applications.

Application information can be found in the Avery Graphics Application Guide.

For surface preparation, converting and printing, and application and removal instructions, please refer to the Avery Graphics Instructional Bulletin.

Construction:

- Face Film: 3.2 mils opaque medium gloss intermediate calendered vinyl film
- Adhesive: 1.0 mil clear acrylic permanent solvent pressure-sensitive adhesive
- Liner: 78# bleached white kraft

Physical Properties:

The following information on physical and chemical characteristics is based upon tests believed to be reliable. The values are intended only as a source of information. They are given without guarantee and do not constitute a warranty. The purchaser should independently determine, prior to use, the suitability of this material for his/her specific purpose. (Data represents averages and is not intended for use as a specification).

- Outdoor durability: 5 years when properly processed and applied (vertical exposure, unprinted film)**
- Application surface contours: Flat and simple curves
- Minimum surface and air application temperature: +50° F (10° C)
- Service Temperature Range: -40° F to +180° F (-40° C to 82° C) (Reasonable range of temperatures which would be expected under normal environmental time and temperature conditions)
- Typical Chemical Resistance: Resistant to most mild acids, alkalis and salt solutions. See instructional bulletin for recommendations on cleaning.
- Shelf Life: One year when stored at the following temperatures and humidity conditions: 68°-77° F (20° - 25° C) and 50±5% R. H.

- Typical Adhesion Values: **180° Peels**

Substrate

Stainless Steel

Glass

24 hrs

4.4 lbs/in

4.7 lbs/in

1 week

5.1 lbs/in

5.3 lbs/in

NOTE: Tested per ASTM D 1000. Always pre-test your specific substrate prior to actual application.

- Reflectivity: NA
- Typical Gloss*: 70 at 60°

Avery Graphics™ A5 Opaque page 1 of 2
AnswerLine: 800-443-9380
Signage.averygraphics.com

- Tensile at Yield: 9.0 lbs/in to 15.0 lbs/in width
- Elongation: 100% minimum
- Dimensional Stability: Less than 0.03 in. (0.762mm). Shrinkage is determined by measuring shrinkage of unprinted film applied to to 36 in.² (91 cm²) aluminum test panel after 72 hrs. aging at 73° F (23° C) 50±5% R.H. followed by 48 hrs. at 150° F (65° C).

Typical Converting Methods:

CUTTING

Computer Sign Cutting: yes

Angle of Blade: 30° or 45°

Minimum letter Height: 0.5 inch

PRINTING

Thermal Transfer Printing: yes

Ink Jet Printing: no

E-Stat printing: no

Screen Printing: no

Exceptions:

Durability Exceptions: Colors with reduced durabilities are as follows: A5077-O Silver and A5247-O Gold are 3-year durable and A5003-O Clear is 4-year durable.

Gloss Exceptions: A5077-O Silver, A5247-O Gold and A5508-O Vibrant Blue have a typical gloss of 50 at 60°.

Pigmented Adhesive Exceptions: none

** Some color fade may occur in severe environmental areas such as, Florida, Arizona, Nevada, New Mexico, Utah, Southwest Texas and Southern California. Durability statement does not apply outside of the contiguous 48 states as testing has not been done in those regions.

WARRANTY: All statements, technical information and recommendations about Avery Dennison products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that Purchaser has independently determined the suitability of such products for its purposes. Avery Dennison products are warranted to be free from defects in material and workmanship for either one year (or the period stated on the specific product information literature in effect at time of delivery, if longer) from date of shipment if said product is properly stored and applied. It is expressly agreed and understood that Avery Dennison's sole obligation and Purchaser's exclusive remedy under this warranty, under any other warranty, express or implied, or otherwise, shall be limited to repair or replacement of defective product without charge at Avery Dennison's plant or at the location of product (at Avery Dennison's election), or in the event replacement or repairs is not commercially practical, to Avery Dennison's issuing Purchaser a credit reasonable in light of the defect in the product.

Avery Dennison's liability for defective products shall not exceed the purchase price paid therefore by Purchaser and in no event shall Avery Dennison be responsible for any incidental or consequential damages whether foreseeable or not, caused by defects in such product, whether such damage occurs or is discovered before or after replacement or credit, and whether or not such damage is caused by Avery Dennison's negligence.

NO EXPRESS WARRANTIES AND NO IMPLIED WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE (EXCEPT AS TO TITLE), OTHER THAN THOSE EXPRESSLY SET FORTH ABOVE WHICH ARE MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND MANUALLY SIGNED BY AN OFFICER OF AVERY DENNISON.